



The Sleek High Performance Bezel-Free POS Terminal

The ADXPOS3 is a highly reliable POS Terminal with the performance of Intel® Celeron® (Bay Trail) processors. Perfect for empowering your business with high performance and sophistication.




Power, Storage and LAN LED status indicate



15" Bezel-Free PCAP Touch





10.1" 2nd Display and VFD Supported



Support 12V / 24V PoweredUSB output

Specifications (1/2)


Model Name		ADXPOS3
Main Board	Main Board Name	X7CE
	CPU	Intel® Bay Trail-Mobile/Desktop SoC Processor: Celeron® N2930 (4 cores, up to 2.16 GHz, max TDP 7.5 Watt) Celeron® J1900 (4 cores, up to 2.42 GHz, max TDP 10 Watt)
	Chipset	Intel® HD Graphics
	System Memory	SO-DIMM DDR3L x 1 1067/1333MHz, Max. 8GB
	Thermal Solution	Fanless
	BIOS	Phoenix uEFI BIOS
	OS	Windows 7, WES 7, POSReady 7 Windows 8, Windows Embedded 8 Standard/Industry Retail WIN 10
Display	LCD size	15" TFT LCD Panel (LED Backlight)
	Brightness	250 nits
	Resolution	1024 x 768
	Panel backlight type	LED
	Touch Screen	P-cap
Storage Device	Interface	SATA x 1 (3.0Gb/S)
	HDD / SSD	mSATA slot x 1
I/O Ports	COM	COM 1 : DB9 RS232 x 1 (5V / 12V by S/W selection) COM 2 : DB9 RS232 x 1 (5V / 12V by S/W selection)
	USB	USB 3.0 x 1 USB 2.0 x 2
	LAN	Gigabit Ethernet by RJ-45 x 1, support Wake on LAN
	Cash Drawer	RJ12 x 1, support 12V / 24V DC cash drawer
	Audio	2 Watt Speaker x 2 (Option)
	Video	DisplayPort x 1
	DC-in	19VDC input, 2pins jack x 1
	Power Button	Power button x 1
Internal Connector	VGA	VGA pin-header x 1
	COM	COM 3: RS232 pin-header x 1 (no power, Option) COM 4: RS232 pin-header x 1 (no power, Option) COM 5: RS232 pin-header x 1 (5V, Option)
	SATA	SATA connector (NB type) x 1
	50pin pin-header	50 pin-header x 1 (EDP, COM6 (12V,VFD), USB2.0*3, Power Switch and LED)
	Audio	Pin Header for Speaker x 1
	Battery	Pin Header x 1
	Cash Drawer Power	Pin header 12V/24V
	Power Switch and LED	Pin Header
Others	Expansion Slot	M.2 2230 E-key slot x 1 (for Wi-Fi module, included USB2.0 signal) Full size mSATA slot x 1 (for mSATA SSD)
	Communication	Wireless LAN module, M.2 2230 E-key (Optional)
	Wall mount	Support VESA Mount
	Power Supply	External adapter, 19V DC input, 65Watt
	Colour	Black
	Material	Plastic / Aluminium
	EMC & Safety Compliance	CE / FCC / VCCI / CB / WEEE / RoHS
	Dimension (W x D x H)	36 x 18.9 x 29 cm (14.2 x 7.5 x 11.4 inch)
	Weight	5.5 kg



Specifications (2/2)

Model Name	ADXPOS3	
Environmental	Operating Temperature	0 to 50°C
	Storage Temperature	-20~ 60°C
	Humidity	20% to 85% RH (non condensing)

I/O Interface

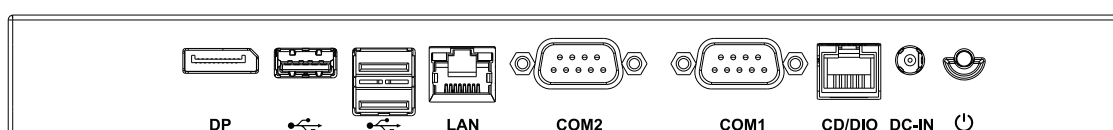


Ordering information

Main Unit

Part No.	Description
ADXPOS3-5B-N2930	Bay Trail POS Terminal w/ 15" TFT LCD Intel® Celeron® N2930 2.16GHz, Black
ADXPOS3-5B-J1900	Bay Trail POS Terminal w/ 15" TFT LCD Intel® Celeron® J1900 2.42GHz, Black

Dimensions (cm / inch)

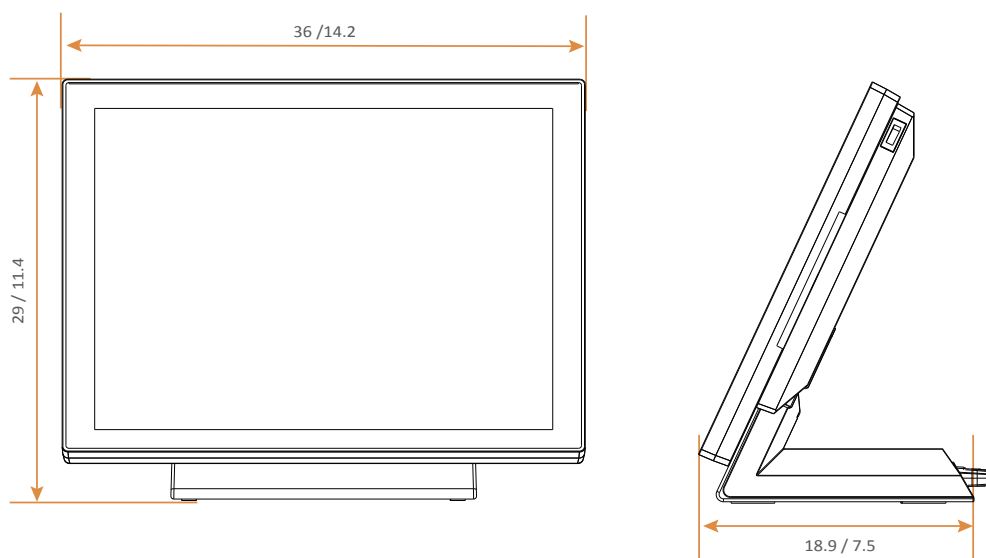

Ardax

Ardax Tech GmbH

Am Schiffbeker Berg 6 22111 Hamburg

Tel. +49-40-4665624-0

Fax +49-40-4665624-55

<http://www.ardax-tech.eu>