
BT-350i

BT-350i Series

Fresh looks and easy operated

Functionally-rich performances

The 2D portable scanner which commits to mobility and scanning excellences.

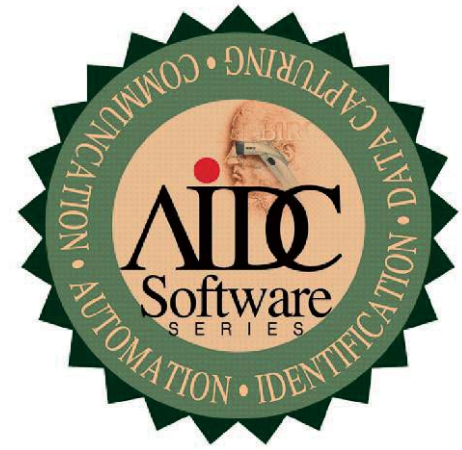



1. Good choice for the tablet or smart phones:

It can scan and read barcodes through applications running on the mainstream andriod operating system and iOS Apple operating system on various smart phones and tablet s through wireless Bluetooth communication.

2. Compatibilities:

Support the original Microsoft mainstream Windows XP, 7.0, 8.0, WIN CE, mobile operating system PC, smart phone, tablet computer to read the barcode.

3. Charging and transmission:

In the case of power failure, the charging cable can not only be used for charging, but also support HID transmission while charging. It also supports power bank power supply.

4. Support HID virtual keyboard scan mode:

The customer's original ERP system does not need to be modified, just capture the cursor, and the barcode entry can be realized! It can also support SPP and BLE methods for customers to develop and call.

5. 3 in 1 can be switched freely:

USB Wired & wireless Bluetooth, wireless 2.4G 3 in 1 can be switched freely. Support Bluetooth HID, SPP, BLE protocol

6. Mass storage:

Built-in 16MB memory for storage mode use, can store more than 200,000 barcode data.

7.Bundled with Holder:

The scanner can be charged on the storage holder to ensure the long-lasting use of power.

Ordering Information:

BT-350iBU: tiny and compact 2D portable scanner, w/storage holder, Black.
BT-350iDU: tiny and compact 2D portable scanner, w/storage holder, White and Black.



BTRCH®

Technical Specifications

Physical parameter	
Size	140*36*42mm （Barcode Scanner）
color	Black / White and Black
Power supply	1000mAh
charging method	5V1A
Accessories	BaseX1, Charging cableX1, dongle X1, manual X1
G.W	450g (including battery)
Scanning performance parameters	
Bluetooth coverage	15m visual range, automatically reconnect after Bluetooth is disconnected
Module	Bluetooth class 4.1
Transmission method	USB+2.4G+Bluetooth
Communication mode	SPP, HID, BLE (with complete SDK)

Decoding ability	1D:Codabar, Code11, Code93, MSI, Code128, UCC/EAN-128, Code39, EAN-8,EAN-13, UPC-A, ISBN, Industrial25, Interleaved25, Standard25, 2/5Matrix, 2D:QR, PDF417, DataMatrix(選配)
Reading accuracy	≥4mil/0.1mm（PCS90%,CODE39）
Depth of field	6~30cm
Scan speed	200 Times/sec
Prompt method	Buzzer, indicator light, vibration
Print contrast	25%
Cylinder scan	35mm diameter
Environmental parameters	
Operating environment	0 to 50 ºC / 32 to 122 ºF
Storage environment	0 to 50 ºC / 32 to 122 ºF
Operating humidity	5-95% (no condensation)
Storage humidity	5-95% (no condensation)



BIRCH®
BIRCH TECHNOLOGY INC

All other products, brands or companies are trademarks or registered trademarks of their respective companies.

Specifications are subject to change without prior notice

BIRCH TECHNOLOGY INC 7F-13, No# 79, Hsin Tai 5th Rd., Sec 1, Hsichih , New Taipei City, Taiwan
Tel:886-2-2698-9596 Fax:886-2-2698-9597 E-mail:sales@mail.birch.com.tw
http://www.e-birch.com

Contact us for details